

Industrial Washer Extractors | Hard Mount with Low Spin



EASY TO USE COMPUTER



Fully programmable computer captures all the features for any customized process. The pre-set programs can be easily modified or erased. Step by step LCD display provides cycle advance, variable time signal & diagnostic checks. Easy to understand & operate.

EFFICIENT INVERTER DRIVE






Single motor variable frequency drive (VFD) gets all precision speeds required for washing distribution, low & normal spin. The energy efficient drive consumes electric peak load demands.

> Available in 15 & 30kg. dry weight per charge capacity

MOTORIZED DRAIN VALVE



"Non Clog Full Clear Port" motorized drain valve flushes all the lint during drain. Easily accessible electric motor is splash proof. Manual lever to activate drain in case of motor failure. Fail safe, rust free operation through out its life.

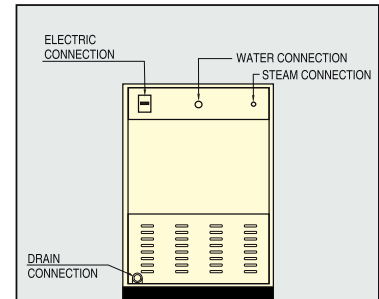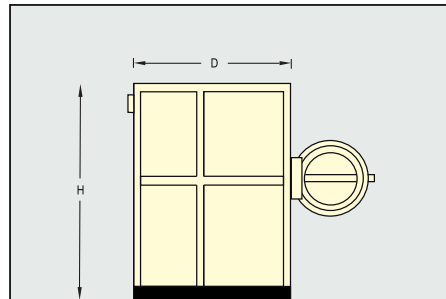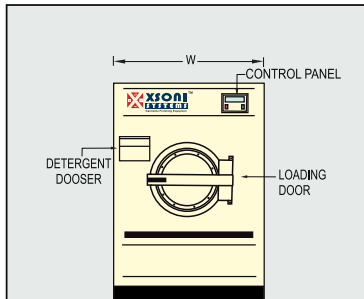

MODEL	CAPACITY DRY WT. IN KG.	BASKET SIZE VOLEME	WASH MOTOR	DRUM SPEEDS		MAIN DOOR OPENING	WATER CONNECTION CONSUMPTION APPX.	DRAIN	HEATING OPTIONS			OVERALL DIMENSIONS (W X D X H)	NET WT./ SHIPPING WT. SHIPPING SIZE (WxDxH) SHIPPING VOLUME
				WASH	FINAL EXTRACT				STEAM CONSUMPTION	ELECTRIC LOAD	THERMAL FLUID CONSUMPTION		
NXS 15 NXE 15	15 KG 15 KG	750 X 400 180 LTRS.	3 HP	45 TO 55 RPM	500 RPM	460	1.0" BSP **60 LTRS./FILL	3"	0.5" BSP 15 KG/HR.	6 KW	-----	980 X 1210 X 1525	500 KG / 650 KG 1180 X 1410 X 1725 2.76M ³
NXS 30 NXE 30	30 KG 30 KG	950 X 500 362 LTRS.	7.5 HP	45 TO 55 RPM	500 RPM	500	1.0" BSP **125 LTRS./FILL	3"	0.5" BSP 25 KG/HR.	12 KW	1" x 1" BSP 10000 Kcal/HR.	1150 X 1420 X 1780	840 KG / 1050 KG 1350 X 1620 X 1980 4.92M ³

Note: a) All Dimensions are in MM. Standard Machines Operate on 415 ±10%, 3 Phase, 50HZ, CYS AC Electric Supply, Special Voltage on request.
 b) Machines are also made to order as per customer's requirement & specifications.

NXS: Steam | **NXE:** Electric