




HYDROCARBON MULTISOLVENT MACHINES

➤ DRYTECH 200 – 300 / HARD MOUNTED / STILL

- Thanks to continued investments in research and development of new technologies in the field of dry cleaning, ITALCLEAN has developed a new concept of machine which dramatically changes the notion of dry-cleaning.
- The new Drytech series represents the optimal solution in those sectors where the use of new solvents has become a must, designed and manufactured thinking of ECOLOGY AND ENVIRONMENT PROTECTION.

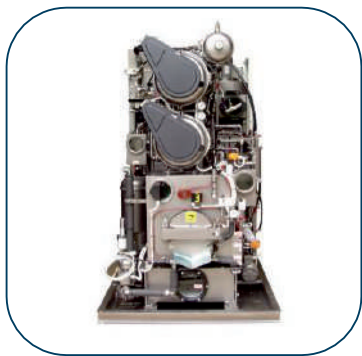

MODEL		DRYTECH	200	300
LOAD CAPACITY		KG	11	15
		LB	26	35
DRUM	VOLUME	DM ³	220	300
	EXTRACT SPEED	RPM	500	500
	STILL	LT	90 / 75	95 / 120
TANKS	1 ST TANK	LT	100	190
	2 ND TANK	LT	100	190
DIMENSIONS	WIDTH	MM	1550	1850
	DEPTH	MM	1300	1490
	HEIGHT	MM	1960	2125
INSTALLED POWER	STEAM MODEL	KW	4.2	4.2
	ELECTRIC MODEL	KW	13	15
	WEIGHT	KG	1197	1647
		LB	2640	3630



HYDROCARBON MULTISOLVENT MACHINES

➤ DRYTECH 300 – 360 – 500 – 900 / SOFT MOUNTED / STILL

- At ITALCLEAN we strongly believe that the fastest way to achieve a complete cycle is to extract the maximum amount of solvent before the drying cycle. Our state of the art electronic balancing system will achieve extraction speeds up to 850 rpm (at 344 G factor) balancing full loads as well as partial loads.
- The variable speed drive gives you the flexibility to program different wash speeds and customize programs for washing every kind of fabric.



MODEL		DRYTECH	300	360	500	900
LOAD CAPACITY		KG	15	18	25	40
		LB	33	40	55	88
DRUM	VOLUME	DM ³	300	362	503	800
	EXTRACT SPEED	G/L'	850	850	800	750
	STILL	LT	100	190	290	420
TANKS	1 ST TANK	LT	120	140	180	320
	2 ND TANK	LT	120	140	180	320
	3 RD TANK	LT	150	180	245	350
DIMENSIONS	WIDTH	MM	1750	2110	2260	2900
	DEPTH	MM	1500	1500	1800	2000
	HEIGHT	MM	2037	2115	2320	2500
INSTALLED POWER	STEAM MODEL	KW	5.5	8	10	11
	ELECTRIC MODEL	KW	15	25	30	-
	WEIGHT	KG	1750	2000	2700	8800
		LB	3850	4400	6380	4800